

<b>REPORT DOCUMENTATION PAGE</b>			Form Approved OMB NO. 0704-0188
Public Reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comment regarding this burden estimates or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188,) Washington, DC 20503.			
1. AGENCY USE ONLY (Leave Blank)	2. REPORT DATE  2007	3. REPORT TYPE AND DATES COVERED  Peer Reviewed Reprint	
4. TITLE AND SUBTITLE  "A Broadband High Spectral Brightness Fiber Based Two-Photon Source"		5. FUNDING NUMBERS DAAD19-03-1-0199 Grant	
6. AUTHOR(S)  Jingyun Fan and Alan L. Migdall			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  NIST, 100 Bureau Dr., STOP 8441, Gaithersburg, MD 20899		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)  U. S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211		10. SPONSORING / MONITORING AGENCY REPORT NUMBER  45116.102-PH-MUR	
11. SUPPLEMENTARY NOTES (See Continuation Page) The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation. <i>Published in Opt. Express 15, No. 6, 2915-2920 (March 19, 2007)</i>			
12 a. DISTRIBUTION / AVAILABILITY STATEMENT  Approved for public release – Federal Purpose Rights.		12 b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  After characterizing the Raman scattering in a fused silica polarization-maintaining microstructure optical fiber, we built a fiber-based two-photon light source of high spectral brightness, broad spectral range, and very low noise background at room temperature. The resulting bright low-noise two-photon light can be used for a number of quantum information applications.			
14. SUBJECT TERMS  single photon, correlated photons, microstructure fiber, quantum information, quantum cryptography, entanglement, spectral brightness, optical nonlinearity, four wave mixing			15. NUMBER OF PAGES  6
			16. PRICE CODE
17. SECURITY CLASSIFICATION OR REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION ON THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT  UU

NSN 7540-01-280-5500

Standard Form 298 (Rev.2-89)

Prescribed by ANSI Std. Z39-18 298-102

**MASTER COPY:** PLEASE KEEP THIS "MEMORANDUM OF TRANSMITTAL" BLANK FOR REPRODUCTION PURPOSES. WHEN REPORTS ARE GENERATED UNDER THE ARO SPONSORSHIP, FORWARD A COMPLETED COPY OF THIS FORM WITH EACH

---

**REPORT DOCUMENTATION PAGE (SF298)**  
**(Continuation Sheet)**

---

# A broadband high spectral brightness fiber-based two-photon source

J. Fan and A. Migdall

*Optical Technology Division, National Institute of Standards and Technology  
100 Bureau Drive, Mail Stop 8441, Gaithersburg, MD 20899-8441  
and  
Joint Quantum Institute, University of Maryland, College Park, MD 20742  
[Jfan@nist.gov](mailto:Jfan@nist.gov)*

**Abstract:** After characterizing the Raman scattering in a fused silica polarization-maintaining microstructure optical fiber, we built a fiber-based two-photon light source of high spectral brightness, broad spectral range, and very low noise background at room temperature. The resulting bright low-noise two-photon light can be used for a number of quantum information applications.

©2007 Optical Society of America

**OCIS codes:** (060.4370) Nonlinear optics, fibers; (190.4380) Nonlinear optics, four wave mixing; (190.5650) Raman effect.

---

## References and links

1. D. C. Burnham, D. L. Weinberg, "Observation of Simultaneity in Parametric Production of Optical Photon Pairs," *Phys. Rev. Lett.* **25**, 84 (1970).
2. P. G. Kwiat, E. Waks, A. G. White, I. Appelbaum, and P. H. Eberhard, "Ultrabright source of polarization-entangled photons," *Phys. Rev. A* **60**, R773 (1999).
3. C. Kurtsiefer, M. Oberparleiter, and H. Weinfurter, "High-efficiency entangled photon pair collection in type-II parametric fluorescence," *Phys. Rev. A* **64**, 023802 (2001).
4. Z. Zhao, Y. Chen, A. Zhang, T. Yang, Hans J. Briegel and J. W. Pan, "Experimental demonstration of five-photon entanglement and open-destination teleportation", *Nature* **430**, 54(2004).
5. L. J. Wang, C. K. Hong, and S. R. Friberg, "Generation of correlated photons via four-wave mixing in optical fibers," *J. Opt. B: Quantum and Semiclass. Opt.* **3**, 346 (2001).
6. J. E. Sharping, M. Fiorentino, and P. Kumar, "Observation of twin-beam-type quantum correlation in optical fiber," *Opt. Lett.* **26**, 367 (2001).
7. M. Fiorentino, P. L. Voss, Jay E. Sharping, and P. Kumar, "All-fiber photon-pair source for quantum communication," *IEEE Photon. Technol. Lett.* **14**, 983 (2002).
8. H. Takesue and K. Inoue, "Generation of polarization-entangled photon pairs and violation of Bell's inequality using spontaneous four-wave mixing in a fiber loop," *Phys. Rev. A* **70**, 031802(R) (2004).
9. X. Li, P. Voss, J. E. Sharping, P. Kumar, "Optical-fiber source of polarization-entangled photon pairs in the 1550 nm telecom band," *Phys. Rev. Lett.* **94**, 053601 (2005).
10. J. G. Rarity, J. Fulconis, J. Duligall, W. J. Wadsworth, and P. S. J. Russell, "Photonic crystal fiber source of correlated photon pairs," *Opt. Express* **13**, 534-544 (2005).
11. J. Fan, A. Dogariu, L. J. Wang, "Generation of correlated photon pairs in a microstructure fiber," *Opt. Lett.* **30**, 1530 (2005).
12. J. Fan, A. Migdall, and L. J. Wang, "Efficient generation of correlated photon pairs in a microstructure fiber," *Opt. Lett.*, **30**, 3368 (2005).
13. Q. Lin, F. Yaman, and G. P. Agrawal, "Photon-pair generation by four-wave mixing in optical fibers", *Opt. Lett.* **31**, 1286-1288 (2006).
14. K. F. Lee, J. Chen, C. Liang, X. Li, P. L. Voss, and P. Kumar, "Generation of high-purity telecom-band entangled photon pairs in dispersion-shifted fiber," *Opt. Lett.* **31**, 1905 (2006).
15. G. P. Agrawal: *Nonlinear Fiber Optics*, 2<sup>nd</sup> ed. (New York: Academic 1995).
16. P. L. Voss and P. Kumar, "Raman-effect induced noise limits on  $\chi(3)$  parametric amplifiers and wavelength converters," *J. Opt. B: Quantum Semiclass. Opt.* **6** S762-S770 (2004).
17. J. C. Knight, T. A. Birks, and P. St. J. Russell, D. M. Atkin, "Endlessly single-mode photonic crystal fibers," *Opt. Lett.* **21**, 1547 (1996).
18. A. Birks, J. C. Knight, and P. St. J. Russell, "Endlessly single-mode photonic crystal fiber," *Opt. Lett.* **22**, 961 (1997).

19. NL-PM-740, <http://www.thorlabs.com>.
20. R. H. Stolen, and M. A. Bosch, "Low frequency and low-temperature Raman scattering in silica fibers," *Phys. Rev. Lett.* **22**, 805 (1982).
21. E. Desurvire, M. J. E. Dignonet, and H. J. Shaw, "Theory and implementation of a Raman active delay line," *J. Lightwave Technol.* **4**, 427 (1986).
22. S. A. E. Lewis, S. V. Chernikov, and J. R. Taylor, "temperature-dependent gain and noise in fiber Raman amplifiers," *Opt. Lett.* **24**, 1823 (1999).
23. F. Koch, S. A. E. Lewis, S. V. Chernikov, and J. R. Taylor, "Broadband Raman gain characterization in various optical fibers," *Electron. Lett.* **37**, 1437 (2001).
24. S. Tanzilli, F. D. Riedmatten, W. Tittle, H. Zbinden, P. Baldi, M. D., Micheli, D. B. Ostrowsky, N. Gisin, "Highly efficient photon-pair source using periodically poled lithium niobate waveguide," *Elec. Lett.* **37**, 26 (2001).
25. S. J. Mason, M. A. Albota, F. Konig, and F. N. C. Wong, "Efficient generation of tunable photon pairs at 0.8 and 1.6  $\mu\text{m}$ ," *Opt. Lett.* **27**, 2115 (2002).
26. F. Konig, E. J. Mason, F. N. C. Wong, and M. A. Albota, "Efficient spectrally bright source of polarization-entangled photons," *Phys. Rev. A* **71**, 033805 (2005).

## 1. Introduction

Since the demonstration of two-photon light created by spontaneous parametric down conversion (SPDC) in a nonlinear crystal by Burnham and Weinberg in 1970 [1], thirty years of optimization have led to very bright two-photon sources [2, 3]. Using two-photon light, entangled states of up to five photons have been created [4]. SPDC converts one photon ( $\omega_p$ ) into two lower energy photons ( $\omega_s$  and  $\omega_i$ ) governed by energy conservation ( $\omega_p = \omega_s + \omega_i$ ) and phase-matching ( $\vec{k}_p = \vec{k}_s + \vec{k}_i$ ). These constraints allow pairs of photons to be emitted into a large number of spatial and spectral modes. Unfortunately for most quantum information applications, light must be delivered in a single spatial mode and preferably with a narrow spectral bandwidth. Thus, a huge collection loss is inevitably encountered when using a SPDC source.

An ideal two-photon light source for quantum information applications would have high two-photon spectral brightness, broad spectral range, output in a single spatial mode, negligible noise background, efficient collection and delivery, and compact physical size. These requirements have led to the  $\chi^{(3)}$ -spontaneous four-wave mixing (SFWM) process in a single-mode fiber (SMF) receiving much attention in recent years [5-14]. At low power, SFWM is often called four-photon scattering, where two photons from the pump field (or fields) are absorbed to create a two-photon state.

Compared to free-space SPDC, a fiber-based two-photon source has many advantages. The tight confinement of the pump light into a SMF's small single transverse spatial mode results in large pump intensity (power/area) ( $P/A$ ) and long interaction length ( $L$ ), maximizing nonlinear optical interactions such as SFWM. The two-photon light creation, collection, wavelength selection and rejection, and wavelength division multiplexing allowed by the broad SFWM gain bandwidth, all can make use of highly evolved optical fiber technology. Having originated in a fiber, the two-photon light can be processed and delivered to a fiber communication network with minimal loss.

In a fiber-based two-photon source, the main single-photon noise background comes from Raman scattering. The amorphous nature of fused silica causes the otherwise limited Raman transition bandwidth to spread into a continuum. The Raman scattering spectrum in a fused silica SMF extends for about 40 THz ( $\Delta\omega$ , detuning from the pump frequency) and peaks at  $\Delta\omega \approx 13$  THz. On the other hand, the SFWM spectrum is determined by fiber dispersion and Kerr-nonlinearity ( $n_2$ ) according to the phase-matching condition [15],

$$\Delta\phi = (k_{\text{signal}} + k_{\text{idler}} - 2k_p)z + 2\gamma Pz$$

$$= \left[ k^{(2)}(\Delta\omega)^2 + 2\sum_{m=1}^{\infty} \frac{k^{(2m)}}{(2m)!} (\Delta\omega)^{2m} + 2\gamma P \right], \quad (1)$$

where  $k_p, k_{\text{signal}}, k_{\text{idler}}$  are wave numbers of the pump, signal and idler beams in the SMF,  $\gamma$  is the nonlinear gain coefficient, and  $k^{(2)}$  is the group velocity dispersion. SFWM is efficient for perfect (or near-perfect) phase-matching ( $\Delta\phi = 0$ ). As the correlated signal and idler photons are detuned from the phase-matched SFWM frequencies, the phase oscillation governs energy flow between the pump and signal and idler fields as they propagate together in the SMF, determining the spectral profile of the SFWM. When group velocity dispersion is significantly less than 0, a small detuning  $\Delta\omega$  is sufficient for efficient SFWM. When group velocity dispersion is close to zero, higher order dispersion terms must be included, requiring a large  $\Delta\omega$  for SFWM phase-matching.

Given the Raman scattering and SFWM gain spectra, there are different approaches to design a fiber-based two-photon source. A recent experiment [14] showed that at room temperature the visibility of the two-photon light produced in a conventional SMF by SFWM with a small  $\Delta\omega$  is limited by the Raman scattering. Liquid nitrogen cooling is needed to deplete the fiber phonon population to achieve a high two-photon coincidence/accidental contrast (C/A) of 100. While this method is a good demonstration of an all fiber-based two-photon source, there are a number of disadvantages. With the small detuning, rejecting scattered light from the pump requires difficult wavelength filtering. The liquid nitrogen cooling required for high two-photon visibility that is necessary for many quantum information applications adds complexity to the operation of the source. Another disadvantage is the limited bandwidth available for use [16].

In our initial experiments [11, 12], we showed the feasibility of creating a bright source of two-photon light using SFWM in a microstructure fiber [17, 18]. The key feature enabling this is the greatly reduced mode area of microstructure fibers that effectively increases the fiber nonlinearity by one order of magnitude over that of conventional SMFs. The particular air-hole pattern also allows more flexibility in designing the fiber dispersion to meet different applications, for example, to have SFWM with large frequency detuning so that the Raman scattering gain is negligible.

In this paper, we present a more detailed experimental study of two-photon light production in a fused silica polarization-maintaining microstructure fiber (PMMF). This polarization characteristic allows for better control of experimental parameters. After characterizing the Raman scattering spectrum of the PMMF, we implemented a two-photon light source with high spectral brightness and negligible noise background over a broad spectral range. With this version of the source, we measured two-photon coincidence rates at the 100 Hz level with C/A = 1000, the best known to date.

## 2. Experiment and discussions

In our experiment, we orient vertically the polarization of all the light pulses, the principal axis of the PMMF, and all other polarization sensitive optical elements. A linearly polarized laser pulse with  $\lambda = 740.7$  nm with a repetition rate of 80 MHz is coupled into the 1.8 m PMMF\* [19]. The light output from the PMMF is directed to an optical grating after passing a polarizing beam splitter to remove any horizontally polarized photons created, for example, by power-induced birefringence and cross  $\chi^{(3)}$ -interactions. We used a two-pass grating

---

\*Certain trade names and company products are mentioned in the text or identified in an illustration in order to specify adequately the experimental procedure and equipment used. In no case does such identification imply recommendation or endorsement by the National Institute of Standards and Technology, nor does it imply that the products are necessarily the best available for the purpose.



$$N_{\text{idler}} = R(\Delta\omega)L_{\text{eff}}BP\left(1 + \frac{1}{e^{h\omega/kT} - 1}\right), \quad (3)$$

where  $L_{\text{eff}}$  is the effective fiber length,  $B$  is the photon collection bandwidth, and the last term accounts for the phonon distribution.

Using Eqs. (2) and (3), the Raman scattering spectrum of the fused silica PMMF was extracted (Fig. 2(c)), and found to be consistent with that of the conventional fused silica SMF [15]. The influence of the Raman scattering-produced single-photon background noise to the SFWM-produced two-photon light is evident in the measured spectrum of two-photon coincidence/accidental (C/A) contrast. The lowest C/A value was seen at the position of the Raman scattering peak. The C/A contrast increases significantly as  $\Delta\omega$  moves away from the Raman scattering peak, with downward modulations by the Raman scattering (Fig. 2(e)).

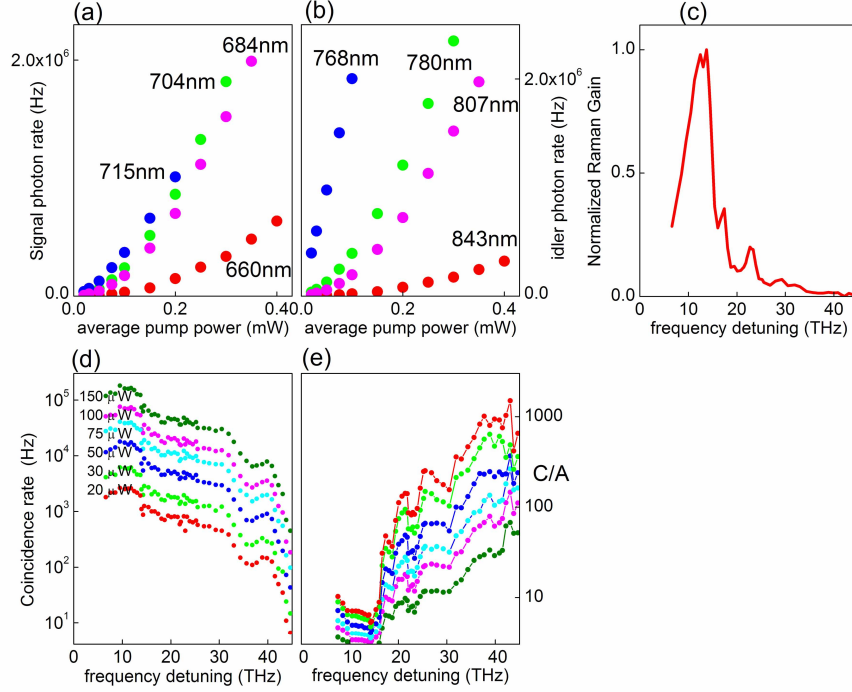


Fig. 2. Measured signal photon (a) and idler photon rates (b) at a range of wavelengths. Signal and idler wavelengths in the same color are correlated. (c) Normalized Raman scattering gain. Measured two-photon coincidence rate (d) and coincidence/accidental contrast (e), where results with same pump powers are labeled with the same color.

With these settings, between  $\Delta\omega \approx 20$  THz and 30 THz, we observed high SFWM gain and C/A contrasts of over 100 (Fig. 2(e)), yielding a 10 THz 3 dB gain bandwidth for the two-photon light. With an average pump power of 30  $\mu$ W, we measured a two-photon coincidence rate of 1 kHz, with  $C/A > 100$  (in a 0.4 THz bandwidth ( $\approx 1$  nm)). This result is significant for several reasons. First, this high two-photon coincidence rate and high C/A contrast were achieved at the same time in a fiber-based two-photon source. Second, this bright two-photon light is available over a broad spectral range, allowing for simultaneous multiple-wavelength operation that could potentially make use of wavelength-division-multiplexing at high rates and high C/A contrasts. Third, because the two-photon production rate is proportional to  $(BP)^2$ , while the Raman scattering rate is proportional to  $(BP)$ , it is possible to improve the two-photon coincidence rate while maintaining contrast. Finally, the experiment was carried out at room temperature.

Our present PMMF-based two-photon source brightness is comparable to the best SPDC, which produces two-photon light at  $\sim 100$  kHz/nW/mW [24-26]. In addition, with the two-photon light created in a single spatial mode, photon collection, filtering, and delivery can be accomplished with minimal loss.

At even larger detuning of  $\Delta\omega \approx 40$  THz, we observed a very high C/A contrast of 1000 at a two-photon coincidence rate of 100 Hz. This relatively high rate with extremely high two-photon purity can be useful for fundamental quantum mechanics tests.

For our PMMF, the SFWM gain spectral region overlaps the region of peak Raman scattering gain, where although the two-photon coincidence rate is maximized, the C/A contrast is less than 10. This suggests that a fiber with similar gain, but bigger dispersion slope, could shift the SFWM gain peak away from the major Raman scattering gain spectral region, leading to a two-photon light source with much higher spectral brightness and low single photon noise background. We believe that such fiber engineering is practical.

In conclusion, our experimental study of a PMMF confirms that fiber-based two-photon sources can have many advantages over SPDC sources, and that SFWM with large frequency detuning is better than small detuning, for the creation of two-photon light. A fiber-based two-photon light source has high two-photon spectral brightness, a broad spectral range, output in a single-spatial mode, negligible noise background, efficient collection and delivery, and compact physical size. With appropriate dispersion management, the fiber-based two-photon source can meet a range of quantum information applications, from the ultraviolet to the infrared, for free-space and long haul communication.

### **Acknowledgments**

This work has been supported by the Disruptive Technology Office (DTO) entangled photon source program, and the Multidisciplinary University Research Initiative Center for Photonic Quantum Information Systems (Army Research Office/DTO program DAAD19-03-1-0199).